



YC60-9




Operating Weight: 12,566 lbs.

Bucket Data: 7.4 Ft³

Output Rating: 47.6 @ 2200 rpm



- Kubota/Tier 4F Engine
- Superior working efficiency
- Lower fuel consumption
- Standard with Rubber Tracks

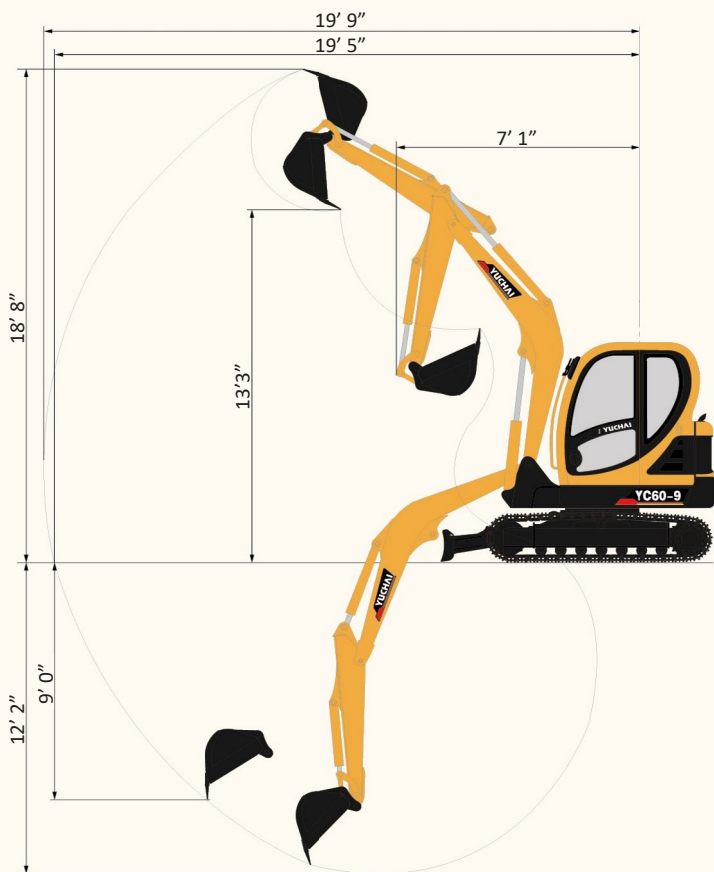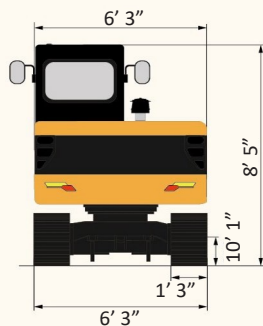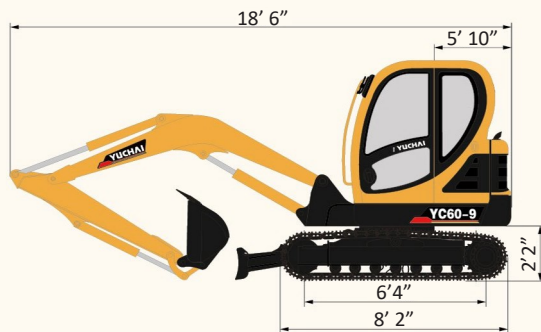

YUCHAI America
2317 Gause Blvd. West
Slidell, LA 70460
Tel: 985-643-8875
Email: sales@yuchaiamerica.com
Website: www.yuchaiamerica.com

Technical Specification

Basic parameter

Machine weight	12,566 lbs.
Bucket capacity	7.4 Ft ³
Width of bucket	30"

Performance parameter

Engine model	Kubota V2403
Engine power	47.6HP @ 2200 rpm
Gradeability	(35°)
Max. digging force of bucket	36.6 kN
Traveling speed	1.3/2.4 km/h
Slewing speed of platform	9~11 rpm

Operating parameter

Max. digging height	18' 8"
Max. digging depth	12' 2"
Max. digging radius	19' 9"
Max. digging radius on ground level	19' 5"
Max. dumping height	13' 3"

Other Parameter

Width of undercarriage	6' 3"
Length of track	8' .181"
Width of track	1' .311"
Height between undercarriage and ground	1' .036"
Height between platform and ground	2' 2"
Platform tail turning radius	4' 1"
Track gauge	6' 4"
Fuel tank capacity	27.3 Gallons
Hydraulic oil tank capacity	19.5 Gallons

Max Auxiliary Flow

Specifications are subject to change without prior notice