



YC80-9




Operating Weight: 17,196 lbs.

Bucket Data: 30" @ 8.4 Ft³

Output Rating: 56.⁸HP @ 2000 rpm

- Yanmar/Tier 4F Engine
- Superior working efficiency
- Lower fuel consumption
- Standard with Rubber Tracks

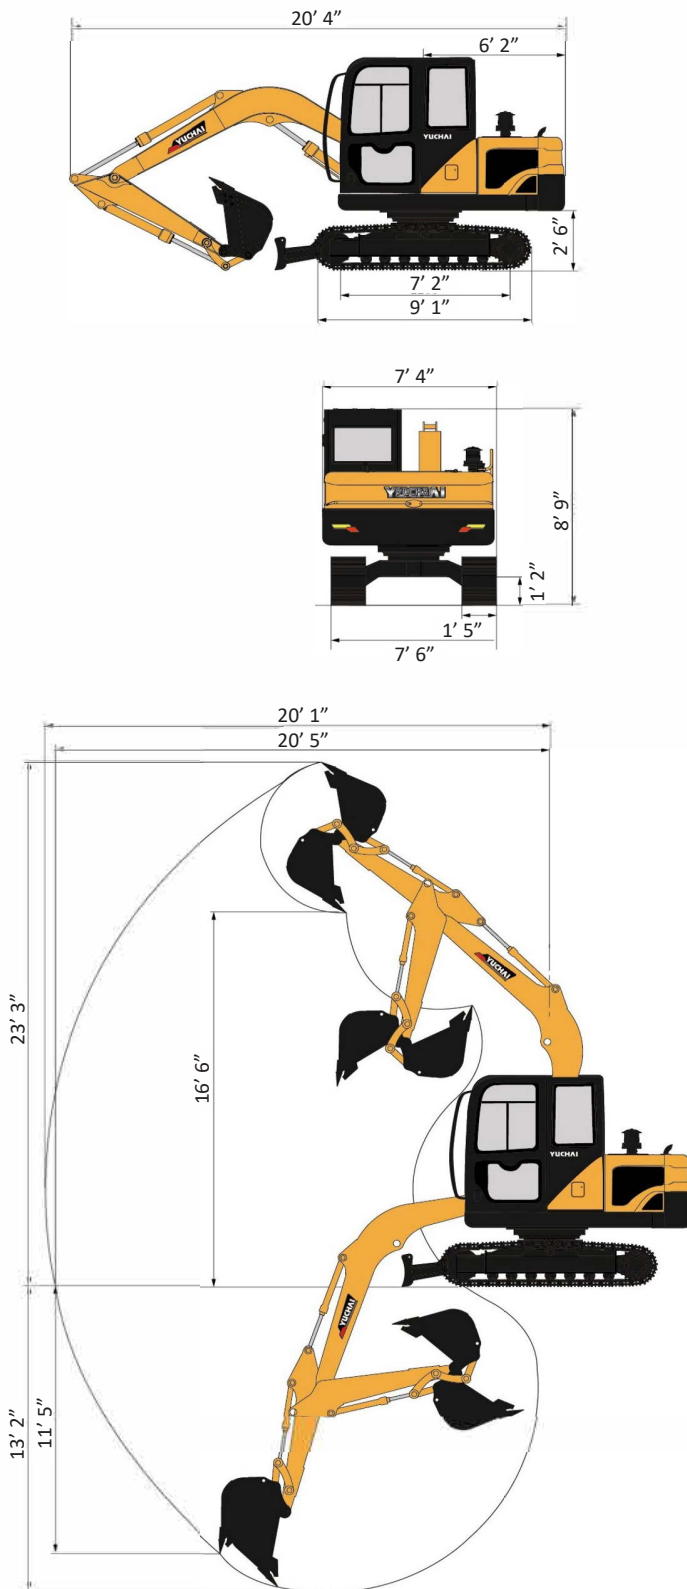

YUCHAI America
 2317 Gause Blvd. West
 Slidell, LA 70460
 Tel: 985-643-8875
 Email: sales@yuchaiamerica.com
 Website: www.yuchaiamerica.com

Specifications are subject to change without prior notice

► Technical Specification

Basic parameter

Machine weight	17,196 lbs.
Bucket capacity	8.4 Ft ³
Width of bucket	30"

Performance parameter

Engine model	Yanmar 4TNV98C
Engine power	56.8HP
Max. Gradeability	35 °
Max. digging force of arm	38 kN
Max. digging force of bucket	56 kN
Traveling speed	2.6/3.9 km/h
Max. hauling force	68 kN
Slewing speed of platform	9~13 rpm

Operating parameter

Max. digging height	23' 3"
Max. digging depth	13' 1"
Max. digging radius	20' 9"
Max. digging radius on ground level	20' 5"
Max. dumping height	16' 6"
Min. slewing radius	6' 2"
Max. vertical digging depth	11' 5"

Transportation dimension

Overall length	20' 4"
Overall width	7' 4"
Overall height	8' 10.5"

Other Parameter

Width of undercarriage	7'
Length of track	9' 1"
Width of track	1' .475"
Height between undercarriage and ground	1' .246"
Height between platform and ground	2' .591"
Platform tail turning radius	6' .170"
Track gauge	7' .217"
Fuel tank capacity	151 L
Hydraulic oil tank capacity	125 L

Boom Swing System

Type:	Offset Boom w/Hydraulic cyl.
Swing Angle (R/L)	80°/50°
Max Auxiliary Flow	